



5/8" top fixing with 3/8" screw fixing (adjustable 90°) and 1/4" adapter for matching any requirement.



Sandbag counterweight available.


Parts made by die cast aluminum to ensure longer lasting mechanical performance and extension linearity of column.

Electric welded aluminum tubing for higher mechanical performance and reduced weight.

Excellent protection against corrosion and wear is ensured by aluminum anodization.



A special articulated coupler allows this model to be used either as a normal stand or boom.

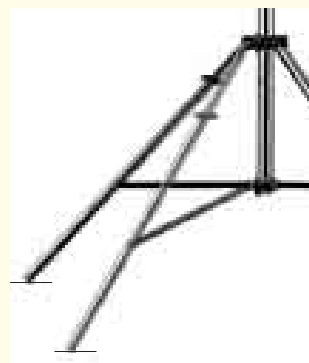

All versions feature leveling leg for better stability.

Double braced legs for extra stability, resistance and safety.



COMBI-BOOM STAND WITH SANDBAG 420B



131cm 392cm 113cm 109cm 2,7kg



9kg 0,9kg@392cm 018 Type 25 + Spigot art. 013

Aluminium stand.
Supplied with sandbag counterweight (empty)
for maximum stability and smoothness.
4 sections, 3 risers.
Ø: 35, 30, 25, 20mm.
Leg Ø: 22mm.
Minimum extension boom: 19cm
Maximum extension boom: 191cm
Maximum load at boom full extension: 2kg with counterweight.

COMBI-BOOM STAND WITHOUT SANDBAG 420NSB

Not illustrated

Same as 420B without counterweight.



COMBI-BOOM STAND HD WITH SANDBAG 420CSU



131cm 392cm 113cm 109cm 5,6kg



12kg 1,5kg@392cm 018 Type 25 + Spigot art. 013

Same as 420B but with legs and column in steel,
last two sections in aluminium.
Maximum load at boom full extension: 5kg with 35kg of counterweight.

COMBI-BOOM STAND HD WITHOUT SANDBAG 420CSUNS

Not illustrated

Same as 420CSU without counterweight.