


AND PUMP CUP \_ Intro

ARMS, BRACKETS, BARS

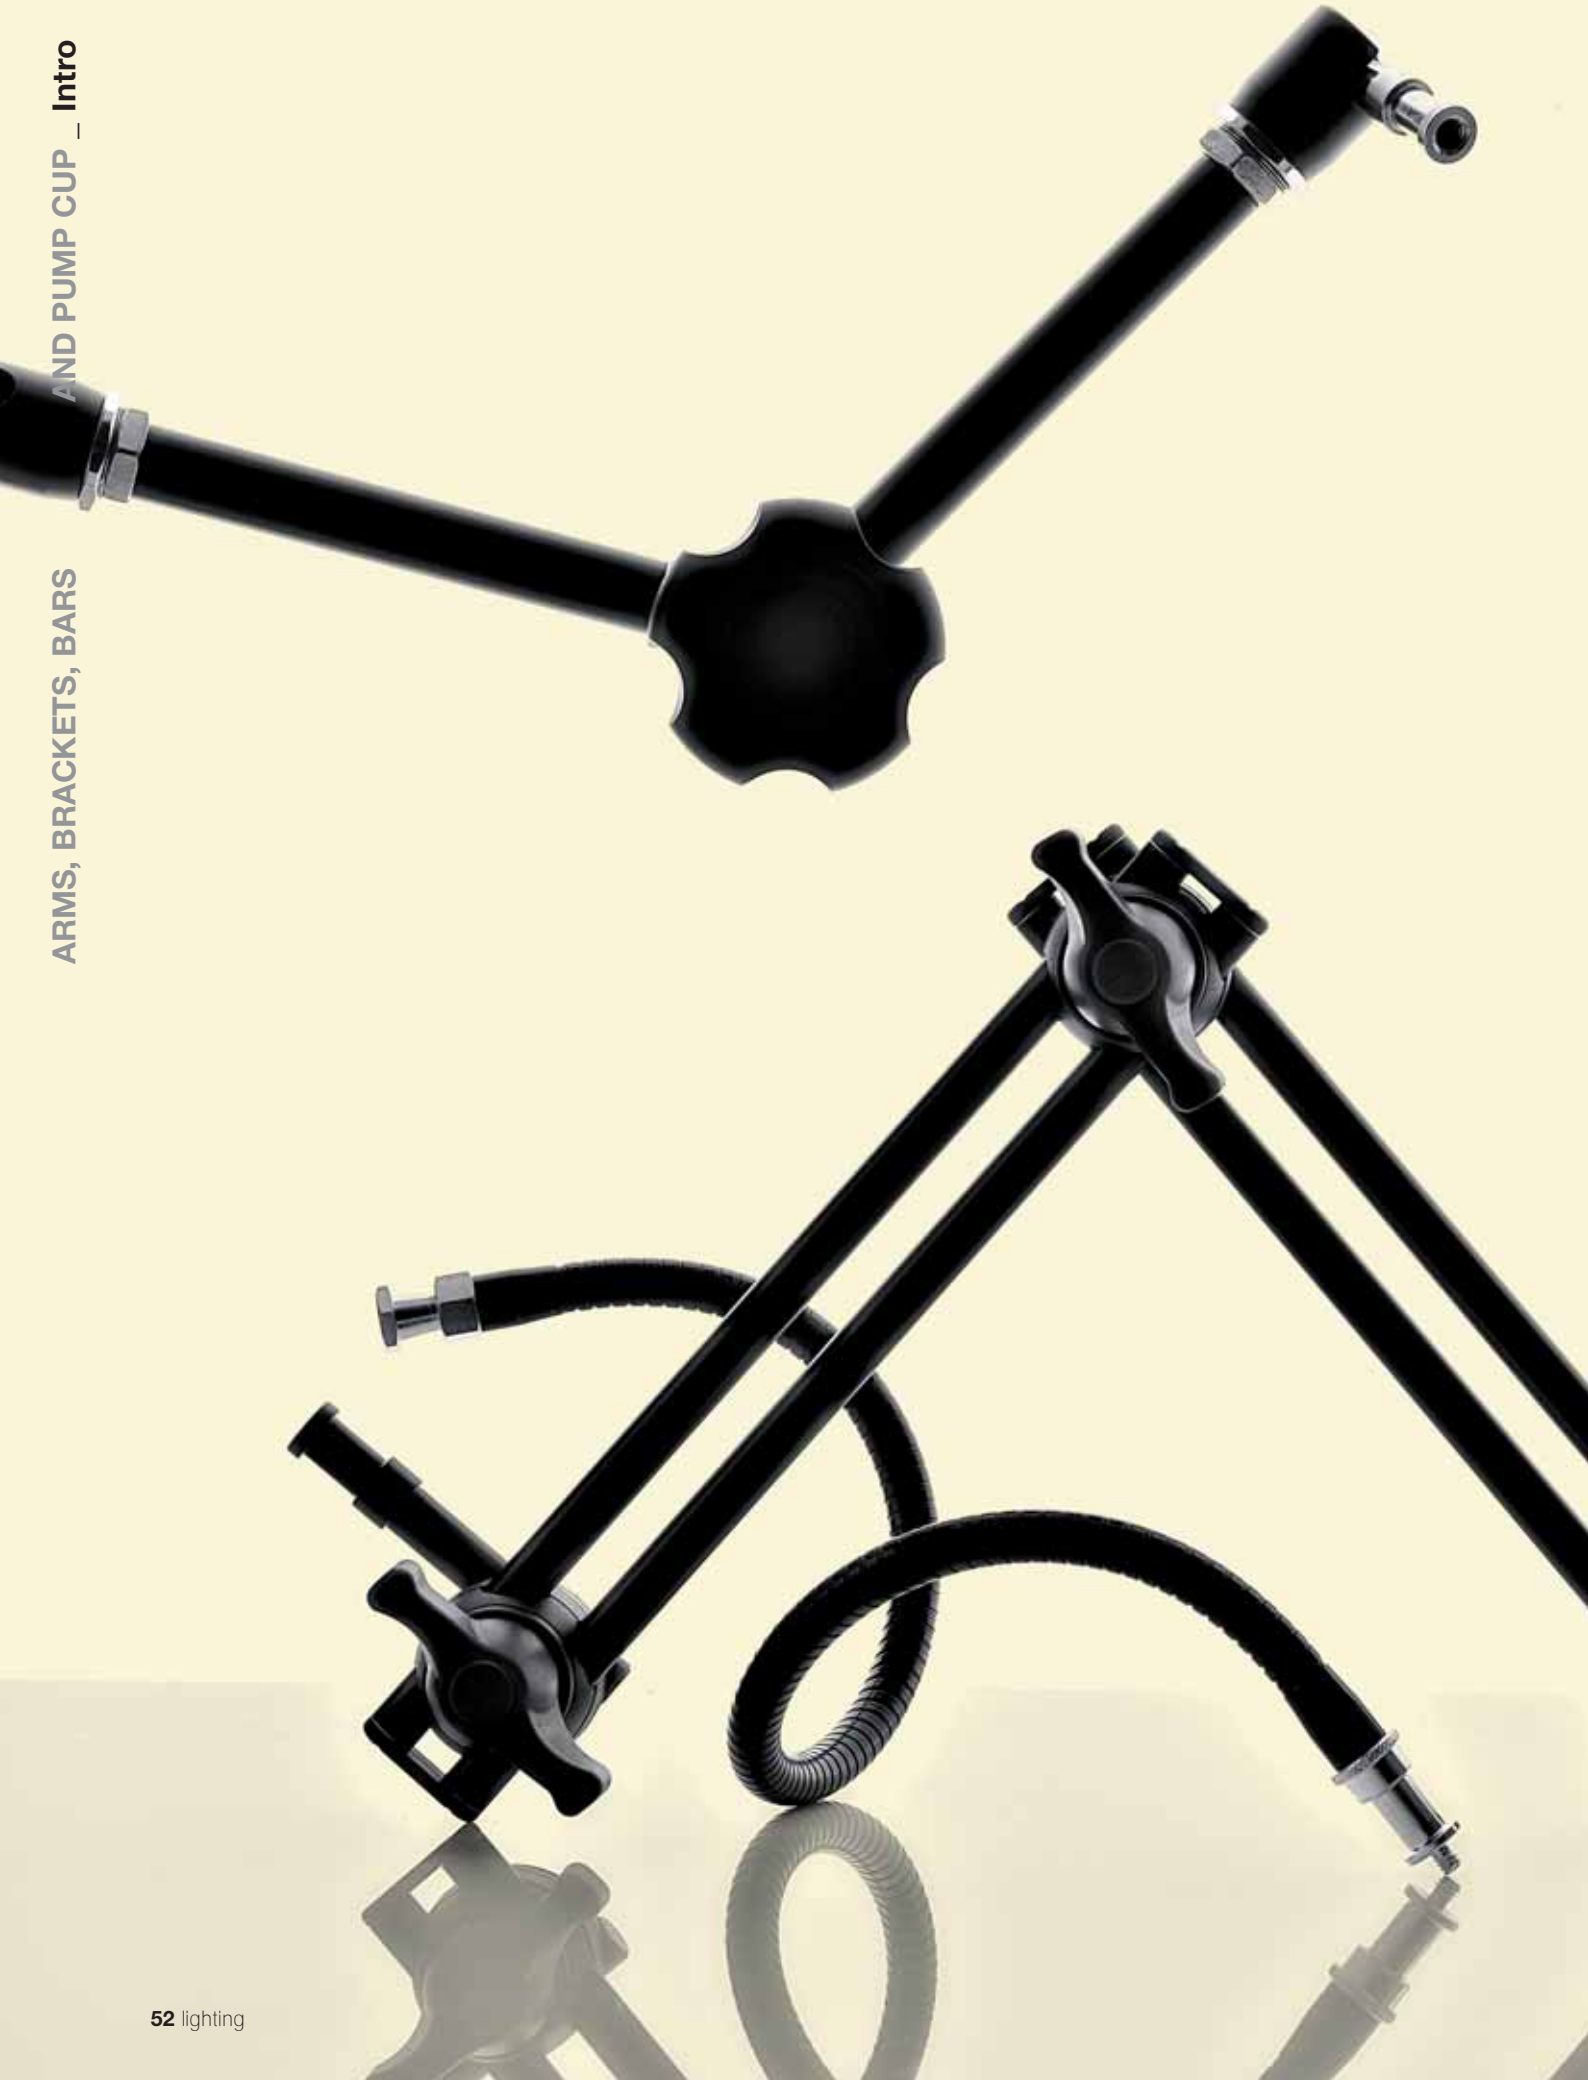

Used in conjunction with stands or clamps, the range of Manfrotto articulated arms, multi positioning arms and attachments enable accurate positioning of lighting and effects. Among the most remarkable products in this range are the double articulated arms, enabling quick positioning thanks to their quick lock knobs.

They are also renowned for being very light as well as very rigid. The Articulated Magic Arm and the Variable Friction Arm are also outstanding, using a single convenient and fast action locking lever or knob to lock or partially lock the two arms and the two swivel studs.

Contents	Page
Arms	54
Brackets	58
Bars	58
Pump Cup	59



Wherever you need to position your camera, light or accessory, we have an arm, a bracket or a bar to fit the task.

Can be combined with clamps, mounting plates and connectors and use in conjunction with virtually any product in the Manfrotto range.

## MAGIC ARM KIT 143



2,55kg



16mm with 1/4" female attachment



3kg



16mm with 3/8" female attachment + Camera Bracket Art. 143BKT

Articulated arm with centre lever to lock all 3 movements.

Length: 53cm.

Supplied with: Camera/Umbrella Bracket 143BKT,  
Super Clamp 035, Backlite Base 003.



## VARIABLE FRICTION ARM WITH CAMERA BRACKET 244



1,09kg



16mm with 1/4" female attachment



3kg



16mm with 3/8" female attachment + Camera Bracket Art. 143BKT

Features as 143A, but a large locking knob takes the place of the cam-lever.

Variable friction and locking of arm obtained by adjusting knob.

Comes complete with Camera/Umbrella Bracket 143BKT only.

## VARIABLE FRICTION ARM 244N Not illustrated

Friction arm only, no accessories.



## MAGIC ARM WITH CAMERA BRACKET 143A



1,07kg



16mm with 1/4" female attachment



3kg



16mm with 3/8" female attachment + Camera Bracket Art. 143BKT

Magic arm with camera bracket only.

## MAGIC ARM 143N Not illustrated

Magic arm only, no accessories.





## CAMERA/UMBRELLA BRACKET 143BKT Not illustrated

Camera bracket only.








### FLEX ARM 237

-  0,4kg
-  Type 18
-  16mm
-  0,3kg

Flexible arm, Ø 13mm, 55cm long with hexagon stud to fit Super Clamp 035 with 3/8" female thread and 16mm stud with 1/4" male thread type 18.





### HEAVY DUTY FLEX ARM 237HD

-  0,75kg
-  Type 18
-  16mm
-  0,5kg

Same as 237, but Ø 18mm.



### CAMERA FLASH ARM 233B

-  0,44kg
-  1kg



Type 1 + Adapter Art.118

2 section (Ø 19 and 16mm) telescopic lift.  
Minimum height: 30cm  
Maximum height: 45cm.



### BASE FOR ARTICULATED ARM 196BASE

-  2,2kg
-  Type 1

Floor desk base for 196, 143, 237, 237HD and 244.

Manfrotto broadens its family of articulated arms, providing end users with a versatile and robust range of products with excellent performance.

The new articulated arms have been designed to be compact and lightweight yet offer high loads capacity and optimum arm length in order to guarantee extreme ease of use, practicality and positioning flexibility with improved safety and reliability.



### SINGLE ARTICULATED ARMS: 2 & 3 SECTIONS

A more versatile version with telescopic features that make this product even more compact than before. Two available versions – at two and three sections- in order to ensure broad range of length, from 605 to 850 mm

Code	Sections	Top attachment	Bottom attachment	Max length	Max load at full extensions	Weight
<b>196AB-2</b>	2	16mm spigot 3/8" light attachment	16mm spigot (compatible with Superclamp) with 1/4" thread	605mm	1,5kg	0,4kg
<b>196AB-3</b>	3	16mm spigot 3/8" light attachment	16mm spigot (compatible with Superclamp) with 1/4" thread	850mm	1kg	0,5kg
<b>196B-2</b>	2	camera bracket with 16mm spigot and camera attachment	16mm spigot (compatible with Superclamp) with 1/4" thread	605mm	1,5kg	0,53kg
<b>196B-3</b>	3	camera bracket with 16mm spigot and camera attachment	16mm spigot (compatible with Superclamp) with 1/4" thread	850mm	1kg	0,63kg



Sliding extensions allow for flexible positioning - Easy to use, even in reduced spaces.



Just turn knob to click-stop and arm position is immediately locked.



Double-anchored spigot with hexagonal (for Super Camp attachment) & universal (for maximum compatibility) sections. Gives extra strength and anti-rotation rigidity.



## DOUBLE ARTICULATED ARMS: 2 & 3 SECTIONS

Excellent performance: robustness, lightness and versatility... these are the features of the new double articulated arm range. The 396 family has been developed to provide greater robustness than the 196 range and to support heavier loads (upto 5kg), though keeping versatility thanks to its extendable sliding arm system (extends upto 860mm), further enhanced by its quick lock system.

The new bottom attachment adds to the strength and versatility of the 396, with a spigot that combines both a hexagonal part (for anti-rotation fixing to the Superclamp system) and a universal adapter section (for fitting to a wide range of stands, clamps and accessories).

Code	Sections	Top attachment	Bottom attachment	Max length	Max load at full extensions	Weight
<b>396AB-2</b>	2	16mm spigot 3/8" light attachment	Double-anchored 16mm hexagonal/universal spigot	625mm	5kg	0,5kg
<b>396AB-3</b>	3	16mm spigot 3/8" light attachment	Double-anchored 16mm hexagonal/universal spigot	860mm	4,5kg	0,79kg
<b>396B-2</b>	2	camera bracket with 16mm spigot and camera attachment	Double-anchored 16mm hexagonal/universal spigot	625mm	5kg	0,64kg
<b>396B-3</b>	2	camera bracket with 16mm spigot and camera attachment	Double-anchored 16mm hexagonal/universal spigot	860mm	4,5kg	0,9kg





### EXTENSION ARM 042



0,21kg 8kg Type 1 + Spigot Art. 013

Fits into Super Clamp 035 socket.  
Length: 19,5cm.



### "L" BRACKETS 041



0,29kg

Set of two brackets to use in combination with Super Clamp 035 to support shelves, etc. 17cm long x 4cm deep.



### EXTENSION BAR 133 **B**



0,1kg

Used to fix 2 Super Clamps 035 at a distance of 15cm from each other.  
Length: 16,5cm.



### MICROPHONE SUPPORT 154 **B**



0,79kg 16mm 16mm + Spigot Art. 013

65cm long T Bar with 3 x 16mm sockets plus 3 x 16mm Spigot Art. 013.  
Designed to fit on stand or bracket with 16mm pin.



### MINI EXTENSION ARM 203



0,15kg 5kg

Fits into Mini Clamp 171 socket.  
Length: 12cm.



### MINI "L" BRACKETS 204



0,13kg

Set of two small brackets for Mini Clamp 171.  
Sizes: 12 x 3 x 3cm.



### LIGHTING GANTRY BAR 135 **B**



0,9kg

For mounting lighting fixtures. Length: 2m.  
To be fixed between 2 Autopoles by means of Narrow "U" Hooks 040.  
Measurements: 200 x 3,5 x 1,5cm.




### FIVE SOCKET BRACKET 169



6,10kg 28mm 28mm 50kg\*

100cm long T Bar with 5 x 28mm sockets for attaching up to 5 lighting fixtures.  
Designed to fit on stand or bracket with 28mm socket.  
\*When load on one side only, max load capacity: 15kg.

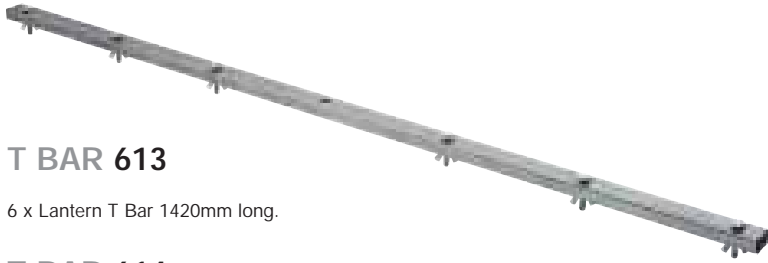

### T BAR 613

6 x Lantern T Bar 1420mm long.

### T BAR 614 Not illustrated

4 x Lantern T Bar 1220mm long.

### T BAR 615 Not illustrated

2 x Lantern T Bar 610mm long.



### T BAR 613PAR

"T" Bar specifically design to carry six PAR 57 or 64 luminaires.

Supplied with a built in TV male spigot.

Max load capacity: 6kg on each attachments, only at the ends 12kg on each side.



### PUMP CUP WITH 16MM SWIVEL SOCKET 241

-  1,2kg
-  2kg
-  16mm

Suction cup for small fixtures and lightweight equipment.  
Ø: 150mm. 16mm bushing with safety pin.



### PUMP CUP WITH 16MM SOCKET 241S

-  1,2kg
-  2kg
-  16mm

A suction cup with a fixed 16mm socket incorporating a safety pin for added security.