


0 U T D O O R . P R O O F

Going to extremes? The outdoor.cases from case specialist B&W International were developed for the toughest outdoor employment and were tested under the most extreme conditions. They are designed for temperatures ranging from -40°C up to -80°C. outdoor.cases are stackable, absolutely watertight (test: descent to depth of 5 meters), dustproof, chemical resistant and corrosion proof. They are also crackproof (test: dropped from a height of 3 meters to

a concrete floor) and virtually indestructible. In short, they are "outdoor proof" and carry an Unlimited Lifetime Guarantee. As for your equipment, it will find all the protection it needs when secured inside an outdoor.cases equipped with either a "pluck" sponge insert (SI) or a reconfigurable padded divider system (RPD). Also, with the use of the comfortable carrying strap your outdoor.cases is easy to take with you anywhere you need to go... in any kind of weather.

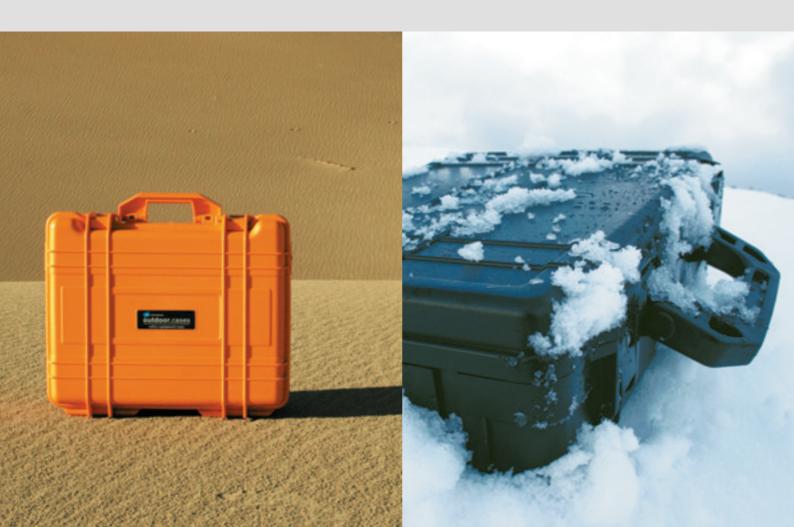

FEATURES

- watertight, dustproof, airtight
- shock resistant, virtually indestructible
- chemical resistant, corrosion proof
- designed for temperatures ranging from -40 up to +80 °C
- durable rubber o-ring seal
- air pressure compensation valve
- fully customizable interior
- padlock eyelets (larger models)
- made from Ultra High-Impact ABS plastic
- Unlimited Lifetime Guarantee



ACCESSORIES

RPD (reconfigurable padded divider)

fully configurable padded partition inserts made of washable, heavy duty nylon fabric with velcro fly attachments. Includes egg crate foam in the lid for full, shock resistant protection.

SI (sponge insert)

removable pre-cut, cubed "pluck" foam insert enabling precision customization of the case's interior plus egg crate foam in the lid for full, shock resistant protection.

CS (carrying strap)

sturdy, weather resistant, comfortable strap makes transport of your **outdoor.cases** a breeze.












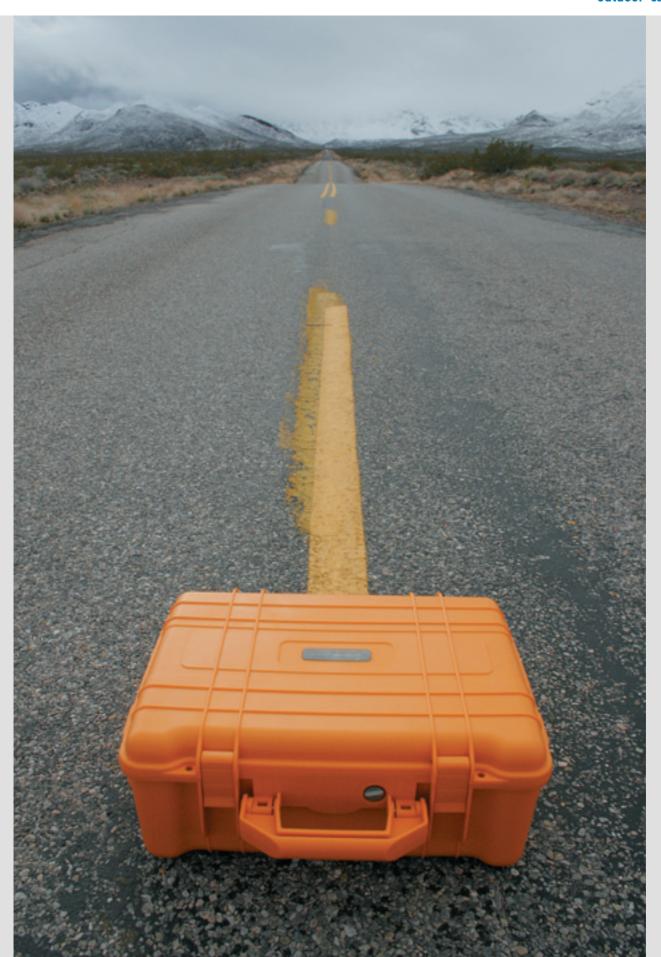



	REF.	INTERIOR DIMENSIONS (mm)	EXTERIOR DIMENSIONS (mm)	WEIGHT	VOLUME	COLOUR
type 05	1.2008	205 x 149 x 79	225 x 180 x 85	0,5 kg	ca. 2 l	B + 0 GT + T



	REF.	INTERIOR DIMENSIONS (mm)	EXTERIOR DIMENSIONS (mm)	WEIGHT	VOLUME	COLOUR
type 10	1.2809	250 x 182 x 80	280 x 212 x 90	0,6 kg	ca. 4 l	B + 0
type 20	1.2816	250 x 182 x 145	280 x 225 x 155	1,2 kg	ca. 7 l	B + 0
type 30	1.3515	335 x 225 x 140	360 x 270 x 155	1,7 kg	ca. 8 l	B + 0
type 40	1.4016	386 x 270 x 153	415 x 328 x 165	1,9 kg	ca. 16 l	B + 0
type 50	1.4618	425 x 350 x 168	460 x 370 x 180	3,0 kg	ca. 25 l	B + 0
type 60	1.5020	475 x 355 x 180	511 x 430 x 200	5,0 kg	ca. 30 l	B + 0
type 65	1.6023	590 x 420 x 200	660 x 500 x 210	7,5 kg	ca. 49 l	В



	REF.	INTERIOR DIMENSIONS (mm)	EXTERIOR DIMENSIONS (mm)	WEIGHT	VOLUME	COLOUR
type 55*	1.4630	420 x 315 x 305	460 x 370 x 320	4,6 kg	ca. 40 l	В
type 68*	1.6033	590 x 435 x 320	660 x 500 x 350	10,5 kg	ca. 82 l	В
type 70	1.7226	675 x 425 x 220	720 x 470 x 260	9,0 kg	ca. 63 l	В

* by special order only

BPS (back pack system)

	REF.	COMPATIBILITY WEIGHT		COLOUR
BPS 40	5.4016	type 40	ca. 1,5 kg	В
BPS 50	5.4618	type 50	ca. 1,5 kg	В
BPS 60	5.5020	type 60	ca. 1,5 kg	В



	REF.	INTERIOR DIMENSIONS (mm)	EXTERIOR DIMENSIONS (mm)	WEIGHT	VOLUME	COLOUR
type 80	1.2820	260 x 200 x 180	280 x 230 x 200	2,0 kg	ca. 9 l	G + B
type 85	1.3226	315 x 234 x 247	340 x 275 x 245	3,5 kg	ca. 18 l	G + B
type 90	1.3820	365 x 245 x 260	380 x 280 x 270	4,0 kg	ca. 23 l	G + B

B: black; G: grey

Note

The cameras illustrated on the pages of this catalogue are for demonstration purposes only, and are not included in the delivery. The dimensions stated are width x height x depth for a closed upright case or closed upright bag. Specifications are subject to modifications without notice.

- perfect case for technical and photo equipment
- empty case made of Ultra
 High Impact ABS plastic
- air pressure release valve
- colour: light grey
- heavy-duty washable waterproof transport bag with easy access pockets
- reconfigurable padded divider system (RPD)








B&W International GmbH

special cases & bags Rudolf-Diesel-Str. 18

A member of the



bwh Gruppe

0049 (0) 54 51 / 89 46-0 Fon: 0049 (0) 54 51 / 89 46-444 Fax: home: www.b-w-international.com eMail: info@b-w-international.com